




PIN	Ø1.0	
APPD.		

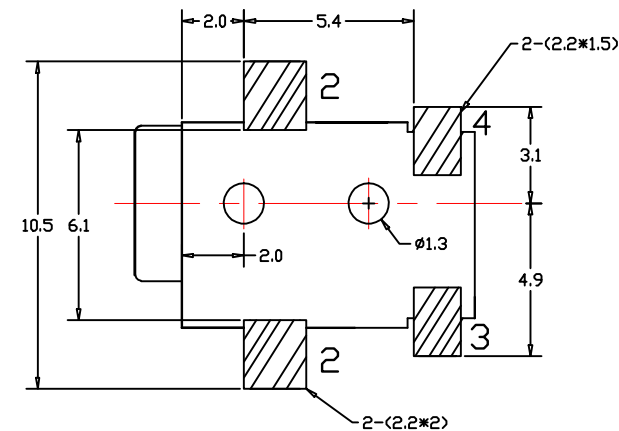

SCHEMATIC

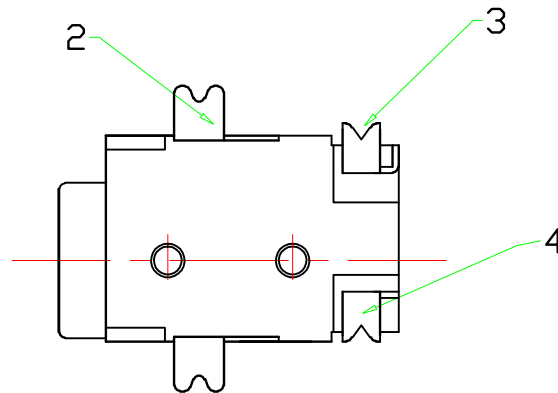

P.C.B LAND

No	DESCRIPTION	QTY	MATERIAL	PLATING	Specifications	<b>DC-038-SMD</b>
1	HOUSING	1	PA46		<b>Ratings:DC 12V 0.5A</b>	
2	SPRING	1	Be-Cu	Ag-Plating	Contact Resistance: 50m ohm	UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.1 ANGLE TOL ±30"
3	CURVE PIECE	1	BRASS	Ag-Plating	Insulation Resistance: 100M ohm at 500V	
4	PIN	1	BRASS	Ag-Plating	Dielectric Strength: AC 500V for 1 Minute	DRAWN: CHENG
5					Insertion & Extraction Force: 0.3-1.5Kg	DATE: 2007-04-08
					<b>Life: 5,000 Cycles</b>	CHECKED:
XYFWCN (WWW.XYFWCN.COM)						DATE:
						APPROVED:
						DATE: