
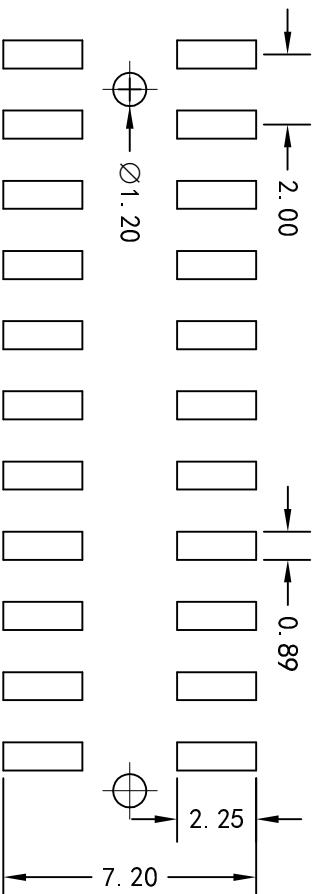

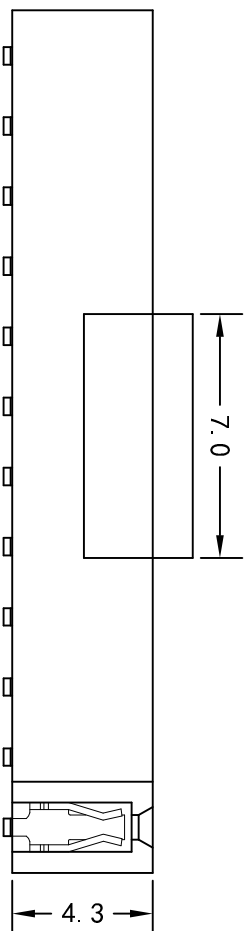


2.00mm Female Header, Dual Row, S.M.T

SPECIFICATIONS

- Current Rating : 1.5A/M/P
- Operation Temperature: -40°C to +105°C
- Contact Resistance : 20m Ω Max.
- Insulation Resistance: 1000M Ω Min.
- Withstanding Voltage : AC 500V
- Insulator Material : Polyester(UL94V-0)
- Standard: Nylon
- Contact Material : Phosphor Bronze
- Contact plating : Au over 50 u" Ni

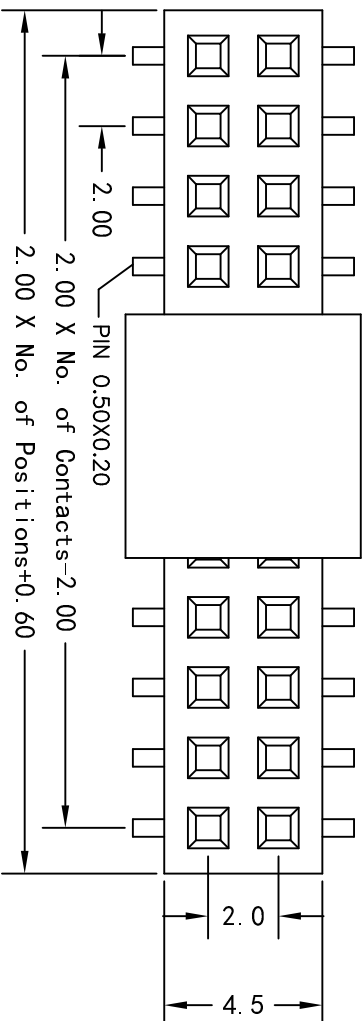

PCB LAYOUT

XYFWCN

未注公差	X: ±0.35 X.X: ±0.25 X.XX: ±0.20 X.XXX: ±0.15	品名规格	FH2.0*4.3 双排 W=4.5 SMT 带CAP		
公司差		客户品号			
Size: A4	UNIT: mm	版本	制图	审核	核准
Scale: 1:1		A/0	易红	王笑	
					日期
					2008-6-28