

项目 Mdx	变更内容 Modification	日期 Date	修改人 Draw	批准 Approve

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating  
1.5A/contact terminal
- 额定电压: Voltage Rating  
30V DC
- 接触电阻: Contact Resistance  
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:  
1000MEGA ohms MIN

物理性能: Mechanical:




- 插拔力: Connector Mate and Unmate Force  
Mate force: 3.57kgf(MAX)  
Unmate force: 1.02kgf(MIN)

原材料: Material:

- 塑壳: Housing:  
Hing Temperature Thermoplastics,
- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 端子四周镀50U“(MIN)镍,镀金区域镀100-200U”镀金1U”  
Tin On Solder Talls
- 外壳: Shell:  
铜壳四周镀80U“(MIN)镍  
Nickel Plating

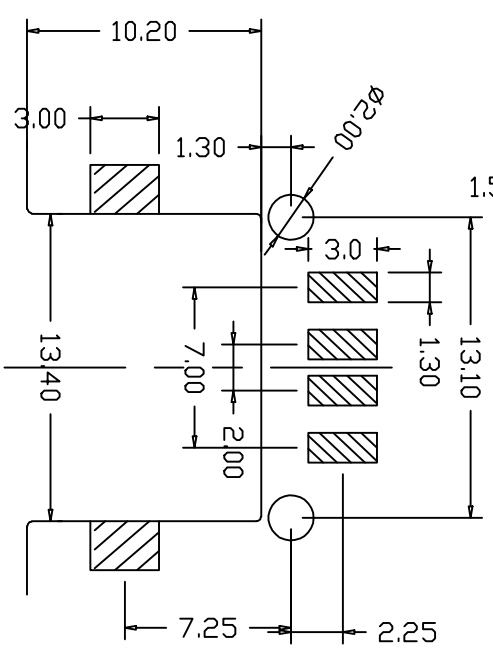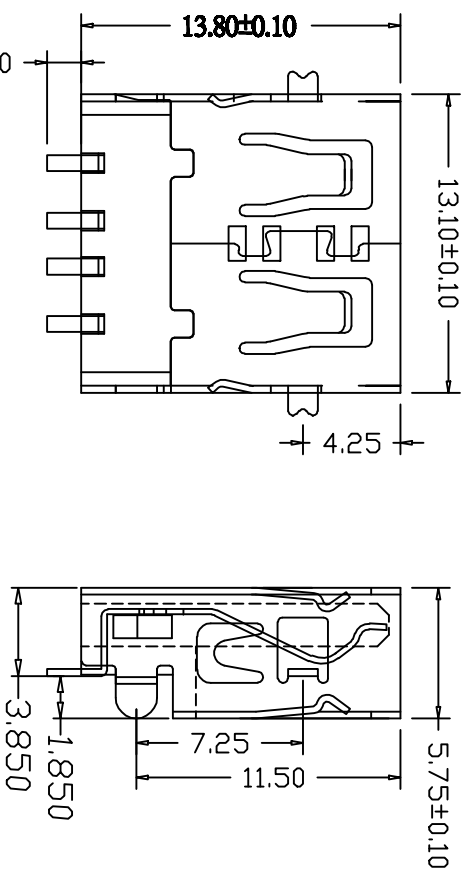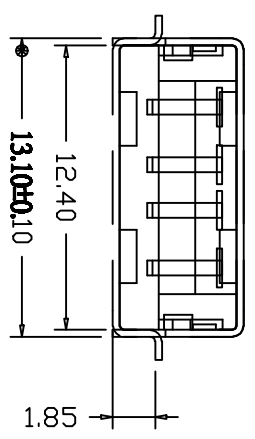

成品 MANUFACTURE DWG		公差 TOLERANCE		日期 DATE		单位 UNIT		制图 DRAWING		DWG NO.	
X±0.20		X±5°		2016.10.20		MM					
XX±0.10		.X±2°				SCALE		DESIGN			
XXX±0.02		.XX±1°				角法 VIEW					