
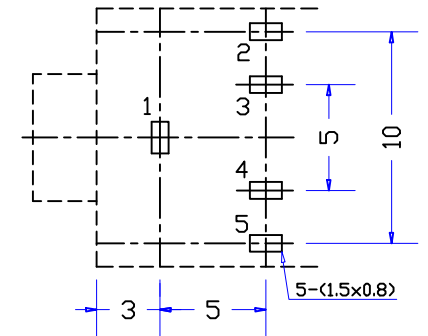
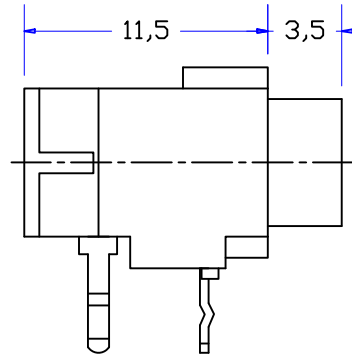


SCHMATIC

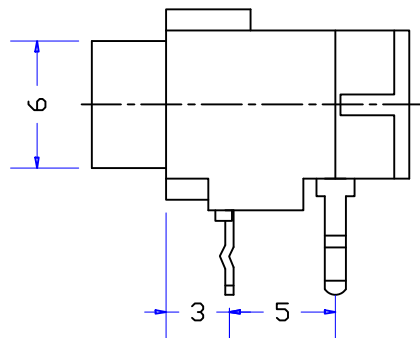

P.C.B TERMINAL POSITION

XF20001476

No				Specifications	PJ-3510C
1				Rating: DC 12V 1A	TITLE: PHONE JACK
2				Contact Resistance: 30m ohm max	UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.1 ANGLE TOL ±30"
3				Insulation Resistance: 100M ohm at 500V	
4				Dielectric Strength: AC 500V for 1 Minute	UNIT: mm SCALE: NA
5				Insertion & Extraction Force: 2-2.0kgf	DRAWN: xing
6				Life: 5.000 Cycles	DATE: 2007-08-15
				Taping: 1.000 Pcs	CHECKED:
XYFW(www.cnxyfw.com)					DATE:
					APPROVED:
					DATE: