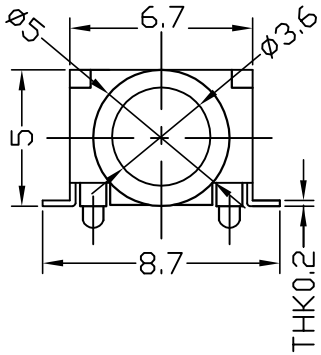

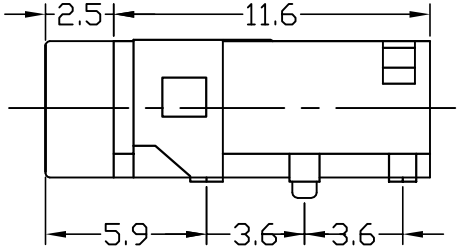

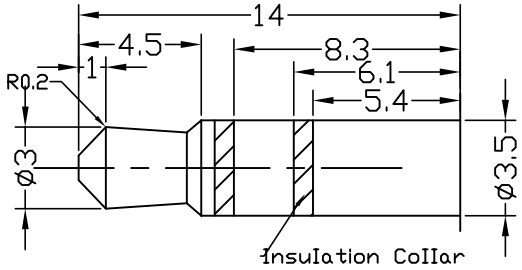



SCHEMATIC

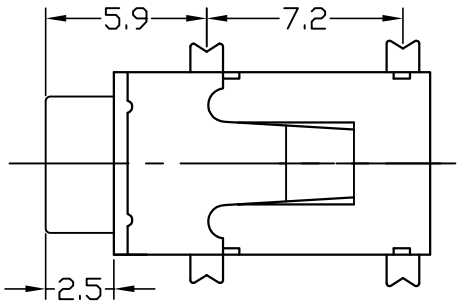

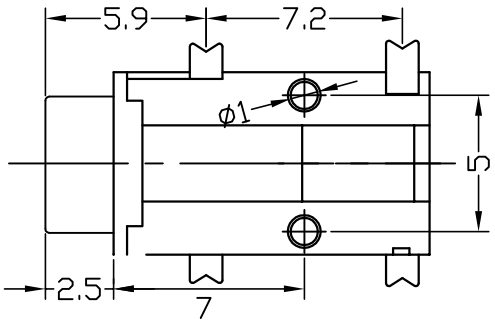

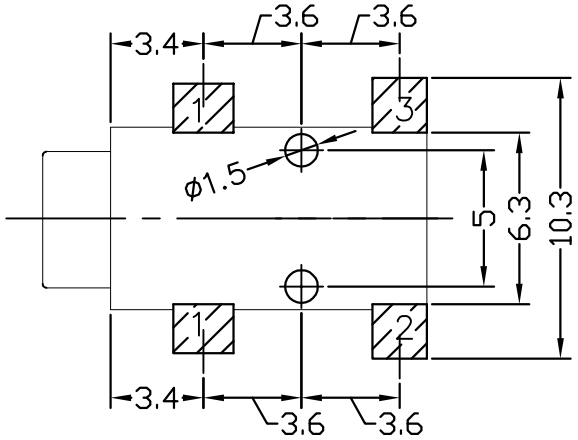

P.C.B TERMINAL POSITION

No					Specifications	
1					Rating:	DC 12V 1A
2					Contact Resistance:	30m ohm max
3					Insulation Resistance:	100M ohm at 500V DC
4					Dielectnic Strength:	AC 500V for 1 Minute
5					Insertion & Extraction Force:	0.6–2.0kgf
6					Life:	5.000 Cycles
					Taping:	1.000 Pcs

XYFW(www.cnxyfw.com)



PJ–1312–SMD	
TITLE: PHONE JACK	
UNLESS OTHERWISE PECIFIED TOLERANCE ±0.1 ANGLE TOL ±30"	
UNIT: mm	SCALE: NA
DRAWN: xing	
DATE: 2002-11-13	
CHECKED:	
DATE:	
APPROVED:	
DATE:	