
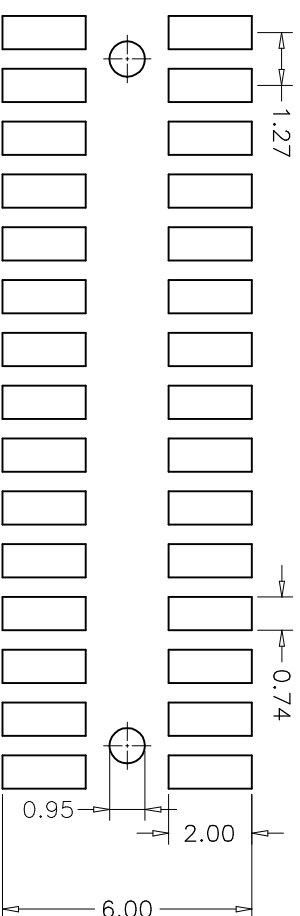

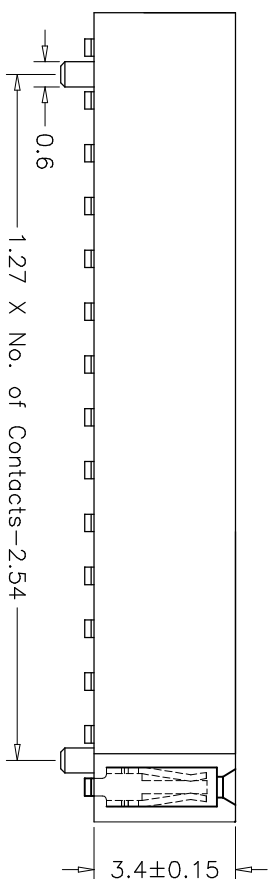


1.27mm Female Header, Dual Row, S. M. T

SPECIFICATIONS

- Current Rating : 1AMP
- Operation Temperature: -40°C to +105°C
- Contact Resistance : 20m Ω Max.
- Insulation Resistance: 1000M Ω Min.
- Withstanding Voltage : AC 500V
- Insulator Material : Polyester(UL94V-0)
- Standard: Nylon-6T
- Contact Material : Phosphor Bronze
- Contact plating : Au or Sn Over 50u" Ni

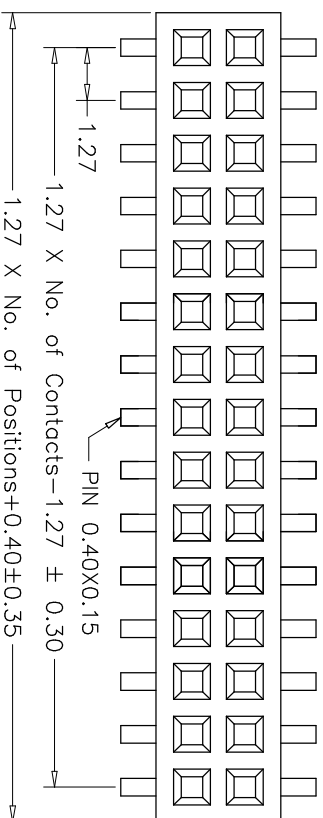

PCB LAYOUT

客户

XYFWCN

X: ±0.35	品名规格	FH1.27*3.4 双排 SMT 带柱			
X.X: ±0.25	客户品号				
X.XX: ±0.20	版本	A/0	制图	审核	核准
X.XXX: ±0.15	UNIT: mm	林良	Wang		
Size: A4 Scale: 1:1				日期	08-5-19