

规格说明:Specifications:
 电气特性:Electrical:

1. 额定电流: Current Rating
2A/contact terminal
2. 额定电压: Voltage Rating
12V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

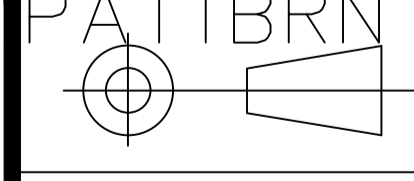
1. 塑胶: Housing:
High Temperature Thermoplastics,
PBT White/Black
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin Sn Solder Tails
2. 外壳: Shell:
Nickel Plating

RBCOMMENDBD P.C.B PATTBRN LAY
 OUT

XYFWCN (WWW.XYFWCN.COM)

UNLESS OTHERWISE SPECIFIED TOLERANCE		RBCOMMENDBD P.C.B PATTBRN LAY OUT	
.X	±0.20	 UNIT MM	TITLE USB AF 双层直插10.5MM无脚无卷边
.XX	±0.15		PART NO. USB-C03-1
.XXX	±0.10	SCALE 3/1	REV. A
ANG.	±2°	SIZE A4	DOC. NO.
APPROVED H.Q.huocy		DATE 2011.03.18	