

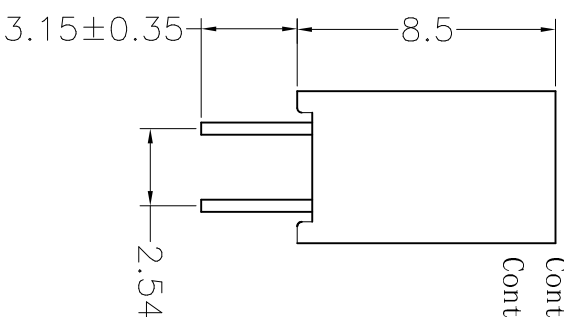
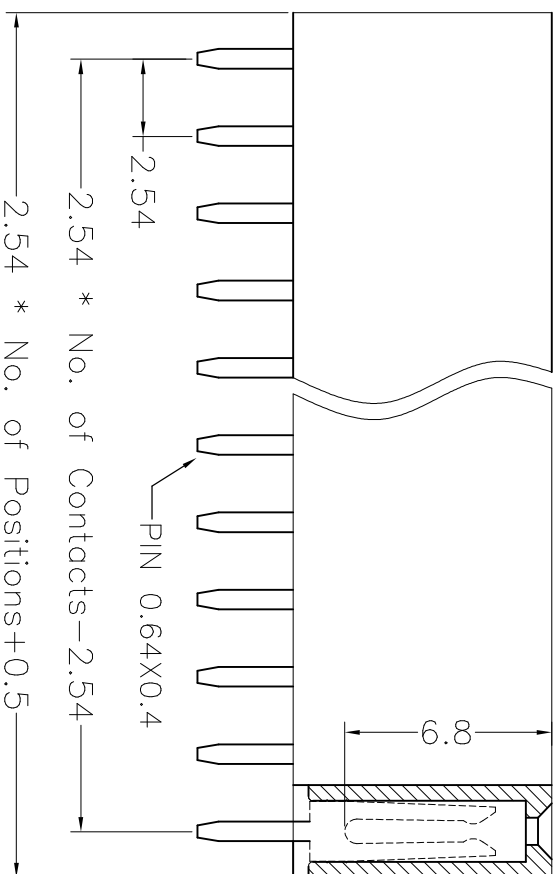


2.54mm Female Header, Dual Row, Straight SPECIFICATIONS

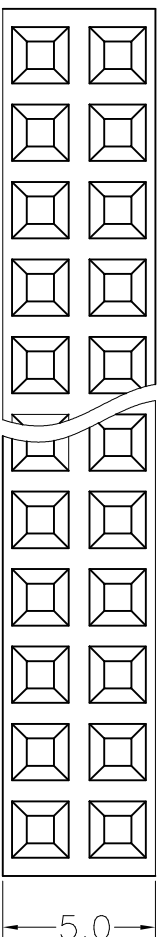

PCB LAYOUT

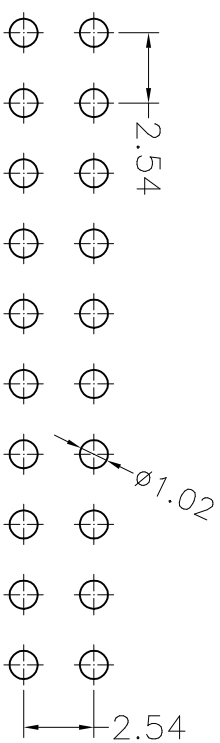

Current Rating : 3AMP
 Operation Temperature: -40°C to $+105^{\circ}\text{C}$
 Contact Resistance : $20\text{m}\Omega$ Max.
 Insulation Resistance: $1000\text{M}\Omega$ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT

Contact Material : Phosphor bronze
 Contact plating : Au or Sn over 50u" Ni

XYFWCN

未注	X: ± 0.35	品名规格	FH2.54*8.5 双排 180度		
公差	X.X: ± 0.25	客户品号			
	X.XX: ± 0.20	版本	制图	审核	核 准
	X.XXX: ± 0.15	UNIT:mm	易 红	王 笑	
Scale: 1:1		A/0			日期
					2008-6-28