


CIRCUIT DIAGRAM

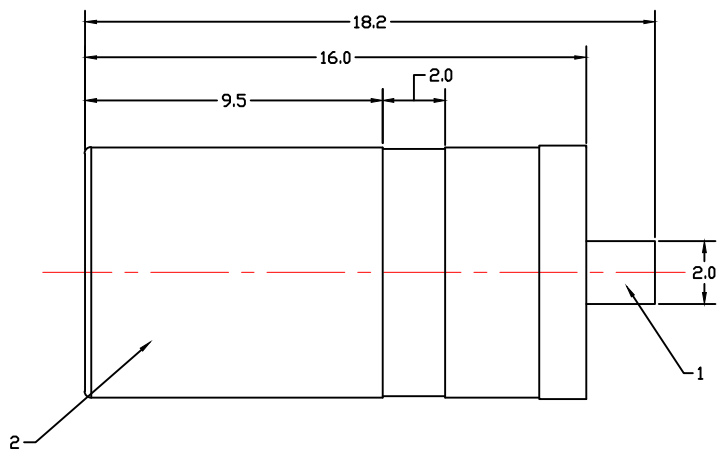

Specifications

Rating: DC 50V 0.1A  
 Contact Resistance: 30m ohm max  
 Insulation Resistance: 100M ohm at 500V DC  
 Dielectric Strength: AC 500V for 1 Minute  
 Insertion & Extraction Force: 0.5-1.0kgf  
 Life: 5,000 Cycles  
 Taping: 1,000 Pcs

|                                                  |                                                                |                  |                  |
|--------------------------------------------------|----------------------------------------------------------------|------------------|------------------|
| DC-010-5.5                                       | UNLESS OTHERWISE SPECIFIED<br>TOLERANCE ±0.1<br>ANGLE TOL ±30° | UNIT: mm         | SCALE: NA        |
| TITLE: DC JACK                                   |                                                                | DRAWN: XING      | DATE: 2009-05-22 |
| Shenzhen City Xiangyunfeiwu Technology Co., Ltd. |                                                                | DATE: 2009-05-22 | CHECKED:         |
|                                                  |                                                                | DATE:            | APPROVED:        |
|                                                  |                                                                | DATE:            | DATE:            |