
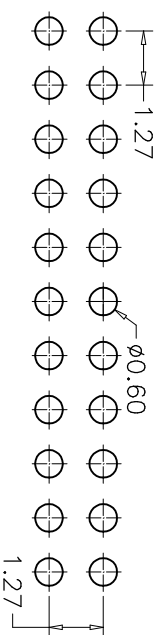

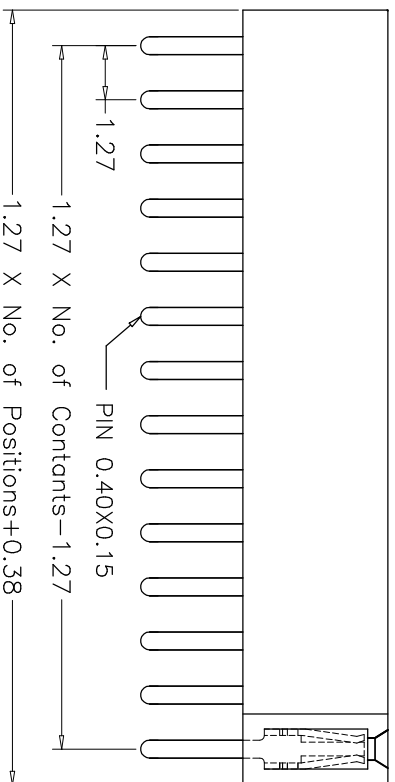


1.27mm Female Header, Dual Row, Straight

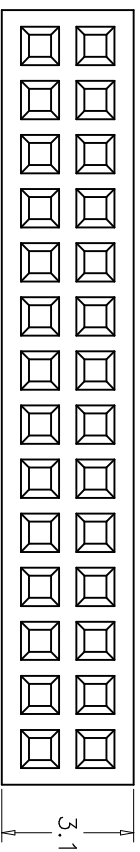

PCB LAYOUT

SPECIFICATIONS

Current Rating : 1AMP
 Operation Temperature: -40°C to +105°C
 Contact Resistance : 20m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester(UL94V-0)
 Standard: Nylon-6T
 Contact Material : Phosphor Bronze
 Contact plating : Au or Sn Over 50 μ "
 Ni

客户

XYFWCN

X: ± 0.35 X.X: ± 0.25 X.XX: ± 0.20 X.XXX: ± 0.15		品名规格 FH1.27*4.3 双排 S/T	
UNIT: mm		客户品号	
◆	版 本	制 图	审 核
Size: A4	Scale: 1:1	A/0	林 良
		Wang	核 准
			07-6-25