


PC Board Layout

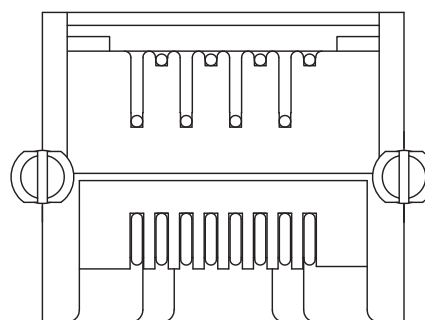

注：灰色

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
- 4. DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING & INSERT MATERIAL : PBT UL94V-0 GRAY.
- 2. CONTACT MATERIAL : DIAMETER 0.45MM PHOSPHOR BRONZE
GOLD PLATING G/FU.
- 3. MATING/UNMATING FORCE : 2.2KG. F MAX.
- 4. RETENTION STRENGTH : 7.7KG. F MIN BETWEEN JACK AND PLUG.
- 5. OPERATING LIFE : 600 CYCLES MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C ~ +85°C.
- 2. OPERATION : -40°C ~ +85°C.

XYFW

UNIT : mm
.0±0.25 .00±0.20 .000±0.10

Approved By: JP. Gong

1X1 Tab-Down RJ45

RJ-55218P8CNL

REV.
A

Drafted by: JG. CHEN

SHEET 1 OF 1