

1	2	3	4	5	6	7	8
Max	Modification	Date	Draw	Approve			
Δ							

规格书: Specifications:

电气特性: Electrical:

- 1. 额定电流: Current Rating  
1.5A/contact terminal
- 2. 额定电压: Voltage Rating  
30V DC
- 3. 接触阻抗: Contact Resistance  
30 milliohms MAX
- 4. 耐电压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
- 5. 绝缘阻抗: Insulation Resistance:  
1000MEGA ohms MIN

物理性能: Mechanical:

- 1. 插拔力: Connector Mate and Unmate Force  
Mate force: 3.57kgf(MAX)  
Unmate force: 1.02kgf(MIN)
- 2. 端子保持力: Terminal Retention  
1.0kgf(MIN)


原材料: Material:

- 1. 塑壳: Housing:  
Hing Temperature Thermoplastics,
- 2. 端子: Contact: Copper Alloy C2680
- 3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 1. 端子: Contact: Plated Gold in Mating Area;  
Tin On Solder Talls
- 2. 外壳: Shell:  
铜壳四周镀80U”(MIN)镍  
Nickel Plating

Shenzhen City Xiangyunfeiwu Technology Co., Ltd.

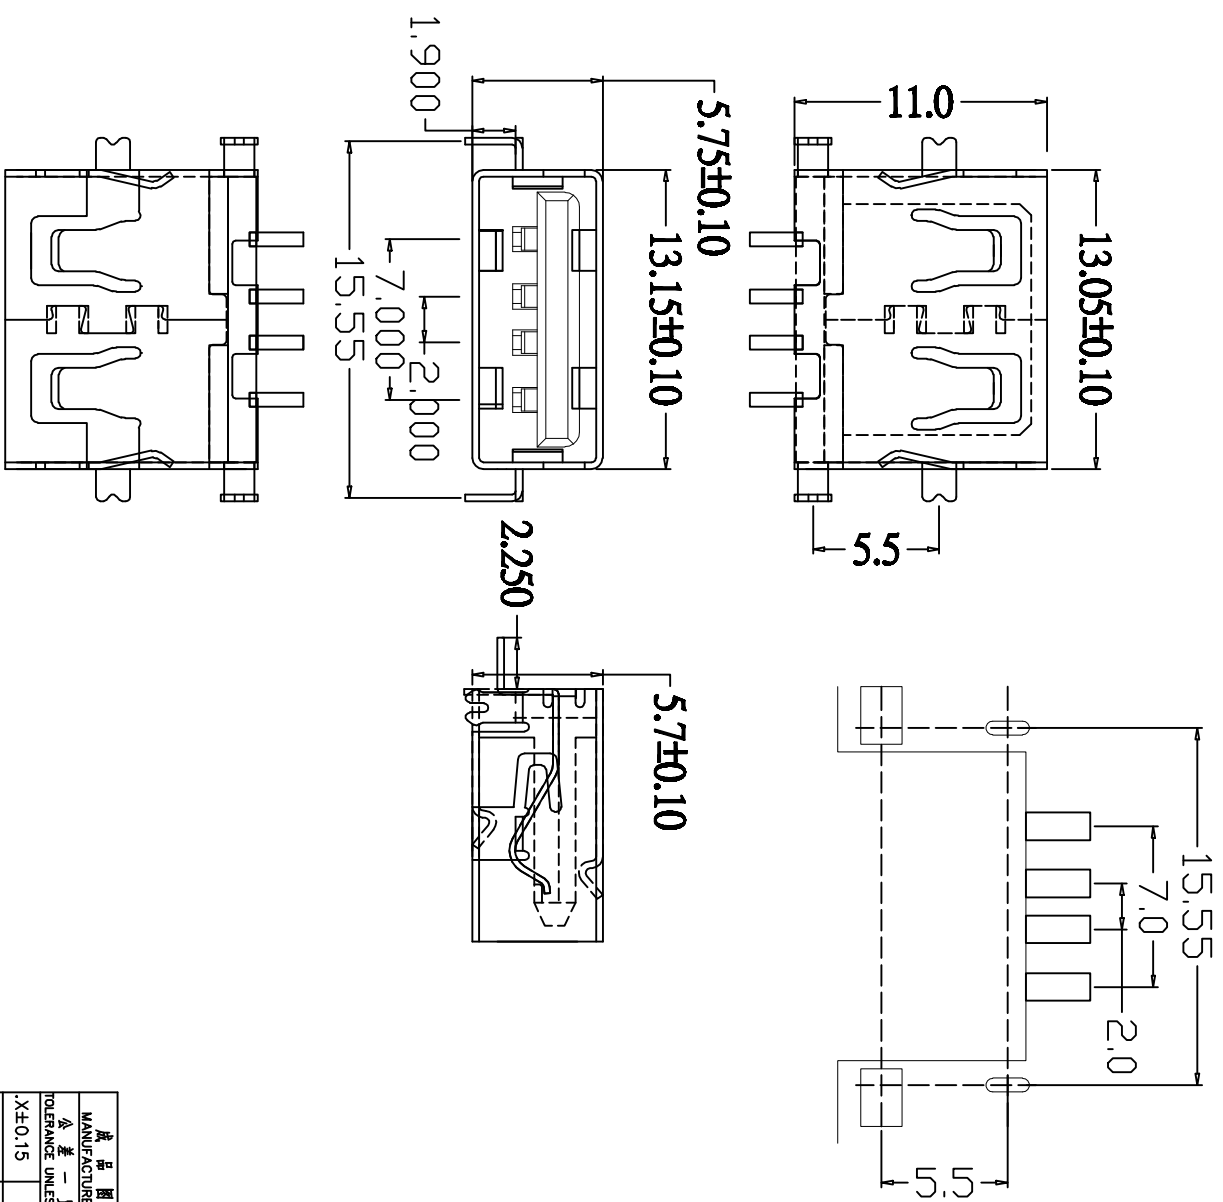

MANUFACTURE DWG		成品图	
公差一律按表		公差一律按表	
TOLERANCE UNLESS OTHERWISE			
.X±0.15	X±5°	DATE	DATE
XX±0.05	.X±2°	CHECKED	CHECKED
XXX±0.02	.XX±1°	APPROVE	APPROVE
		UNIT	MM
		SCALE	1:1
		DESIGN	LUFU
		NAME	
		VER	VER
		SHEET	SHEET
		PG1	PG1