




2.00mm Female Header, Dual Row, Straight

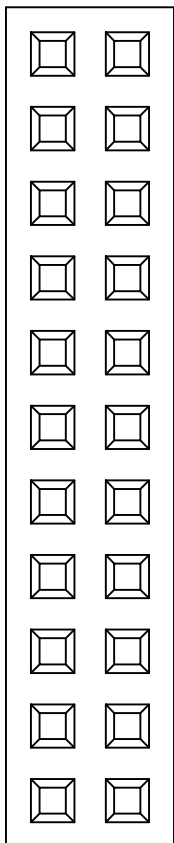

4.0±0.15

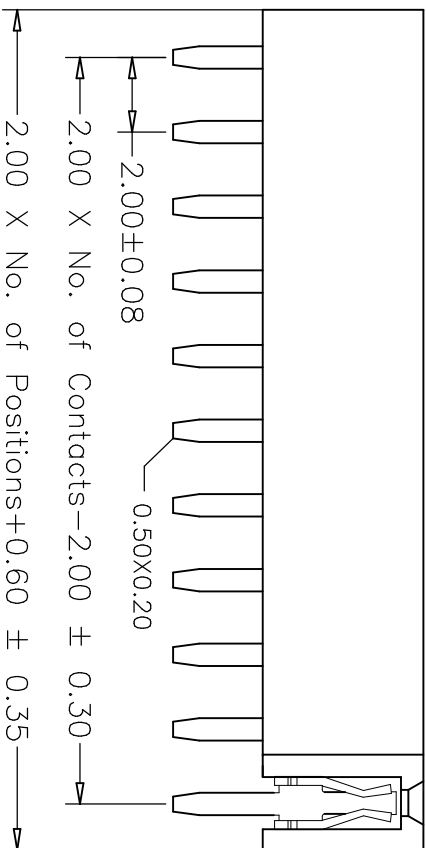


4.6±0.15

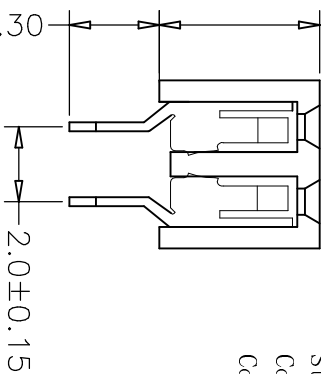

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Phosphor Bronze
 Contact plating : Au over 50 u" Ni

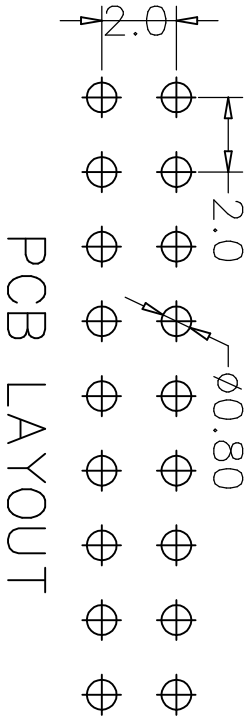

PCB LAYOUT

XYFWCN

未注公差	X: ±0.35 X.X: ±0.25 X.XX: ±0.20 X.XXX: ±0.15	品名规格	FH2.0*4.6 双排 W=4.0 180度 PC3.0		
Size: A4	UNIT: mm	客户品号	版本	制图	审核
Scale: 1:1		A/0	易红	王笑	日期
					2008-6-28