

Mapx	?	?	?	?	?	?	?	?	?
Modification	?	?	?	?	?	?	?	?	?
Date	?	?	?	?	?	?	?	?	?
Draw	???	???	???	???	???	???	???	???	???
Approve	???	???	???	???	???	???	???	???	???

规格说明: Specifications:

电气特性: Electrical:

- 1. 额定电流: Current Rating
- 1.5A/contact terminal
- 2. 额定电压: Voltage Rating
- 30V DC
- 3. 接触电阻: Contact Resistance
- 30 milliohms MAX
- 4. 额定电压: Dielectric Withstanding Voltage:
- 500 V AC AT Sea Level
- 5. 绝缘电阻: Insulation Resistance:
- 1000MEGA ohms MIN

物理性能: Mechanical:


- 1. 插拔力: Connector Mate and Unmate Force
- Mate force: 3.57kgf(MAX)
- Unmate force: 1.02kgf(MIN)
- 2. 端子保持力: Terminal Retention
- 1.0kgf(MIN)

原材料: Material:

- 1. 塑壳: Housing:
- Hing Temperature Thermoplastics,
- 2. 端子: Contact: Copper Alloy C2680
- 3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 1. 端子: Contact: Plated Gold in Mating Area;
- Tin On Solder Tails
- 2. 外壳: Shell:
- 铜壳四周镀80U”(MIN)镀
- Nickel Plating

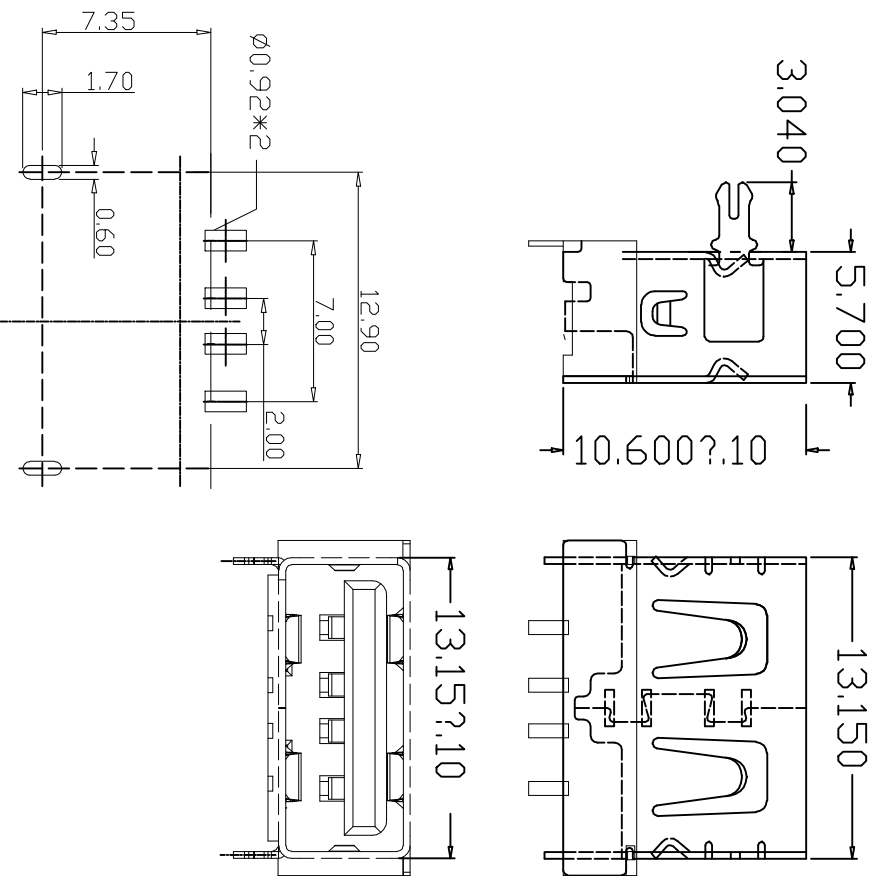

MANUFACTURE DWG	成品图
TOLERANCE UNLESS OTHERWISE	公差一览表
.X±0.15	X±5°
.XX±0.05	.X±2°
.XXX±0.02	.XX±1°

DATE	DATE	UNIT	MM	DRAWING	DRAWING NO.	DWGNO.
CHECKED	CHECKED	SCALE	1:1	DESIGN	DESIGN NAME	10.0A母外壳
APPROVE	APPROVE	SCALE		DESIGN	DESIGN NAME	10.0A母外壳
VER	VER	SHEET		VER	VER	PG1