
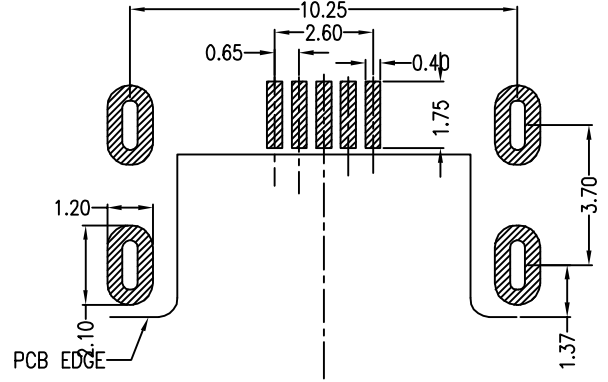
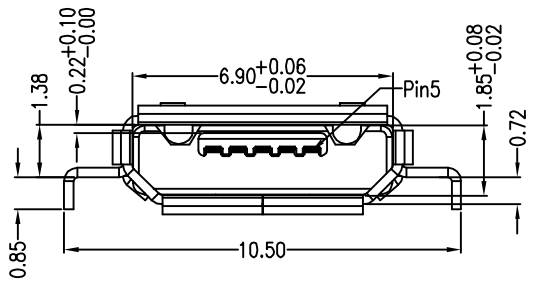
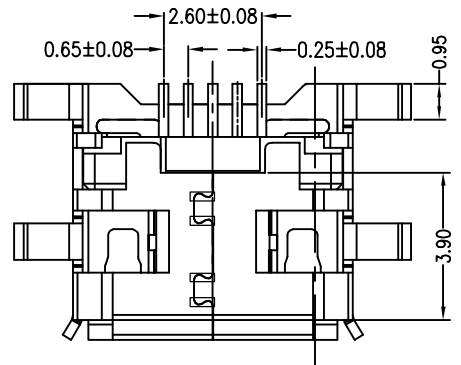

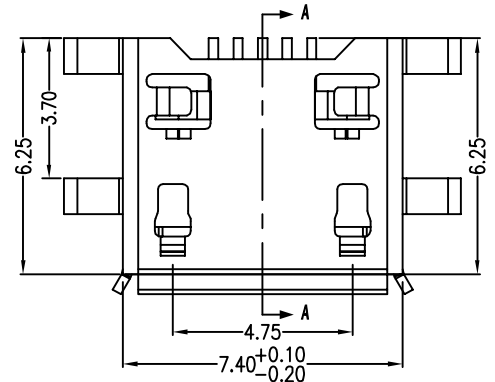
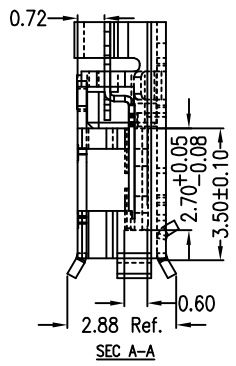
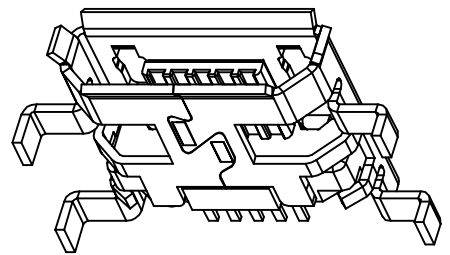


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

A
B
C
D
E
F

A
B
C
D
E
F

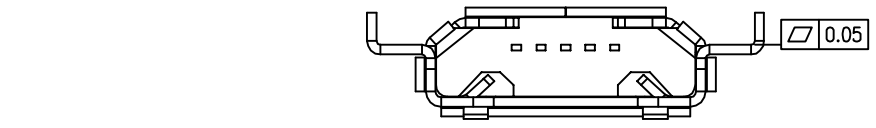

Note:
 1.Material:
 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
 1.2 Contact: copper alloy,t=0.15mm
 1.3 Shell: copper alloy,t=0.25mm
 2.Specification:
 2.1 Current rating: 1 A Max.
 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
 2.3 Contact resistance: 50 mW Max.
 2.4 Insulation resistance: 100 MW Min.
 2.5 Total mating force: 3.57 Kgf Max.
 2.6 Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extraction cycles
 2.7 Temperature range: -30°C~80°C

A 01 S B X X X X X X X 3-056

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

- ① 产品代号 A:成品
- ② 产品系列 01:micro usb 5pin
- ③ 产品类别 S:母座
- ④ 产品类型 B:B TYPE
- ⑤ 外壳材质 1:C2680R-H
- ⑥ 外壳电镀 0:素材;1: Ni100u'';2:雾Sn100u'';3:Ni+Au1u''(圆);4:全Au1u''
- ⑦ 端子材质 4:05191R-EH 2:C2680R-EH
- ⑧ 端子电镀 0:素材;1:全Au1u'';2:全Au1.5u'';3:全Au0.5u'';4:全Au10u'';5:全Au15u'';6:全Au30u'';7:雾Sn+Au1u'';8:雾Sn+Au0.5u'';9:雾锡Au1.5u'';10:雾锡Au0.5u''
- ⑨ 主体材质 1:LCP
- ⑩ 主体颜色 B:黑色 W:白色
- ⑪ 包装方式 1:吸塑管;2:卷带;4:pe袋
- ⑫ 下板类型 3:沉板式
- ⑬ 细节流水 056:Micro usb 5s B Type Smt无接地片(沉板式0.65)

PART NO: AO1SBXXXXXX3-056		MATERIAL: SEE NOTE	
MODEL NO: XX		FINISH: SEE NOTE	
UNIT: MM	SIZE: A4	COLOR: SEE NOTE	
TOLERANCE UNSPECIFIED		DR: 夏友红	
.x	0.25	CHK:	
.xx	0.15	APP:	
.xxx	0.10	SCALE: 5:1	
Ang.	2'	DATE: 2012.05.22	
		REV: A	

